

Product Image



Product Dimensions

Characteristics

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		2.6Ah
Capacity 25°C (77 °F)	10 hour rate (0.25A)	2.49Ah
	5 hour rate (0.46A)	2.31Ah
	1 hour rate (1.71A)	1.71Ah
Internal Resistance	Full Charged Battery 25°C	≤40mΩ
Capacity affected by Temperature (10 hour)	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
	-15°C (5 °F)	65%
Self-Discharge 25°C (77 °F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77 °F)	Float	Initial Charging Current Less than 0.78A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 0.63A Voltage 14.4-15.0V

Packaging

Battery Dimensions	Length	70mm
	Width	47mm
	Height	101mm
	Total Height	106mm
Box Dimensions	Length	419mm
	Width	192mm
	Height	188mm
Quantity Per Box		20 PC per box
Net weight Per Cell		1.0kg±50g
Net weight Per Box		20.0kg
Gross Weight		20.5kg

Discharge Constant Current per Cell (Amperes at 77°F/25°C)


F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	7.3	4.8	3.6	2.42	1.69	1.45	0.91	0.62	0.41	0.28	0.23	0.12
1.65V	7.1	4.8	3.6	2.38	1.66	1.43	0.89	0.61	0.41	0.27	0.23	0.12
1.70V	7.0	4.7	3.5	2.33	1.63	1.40	0.87	0.60	0.40	0.27	0.22	0.12
1.75V	6.9	4.6	3.4	2.29	1.60	1.37	0.86	0.59	0.39	0.26	0.22	0.11
1.80V	6.6	4.4	3.3	2.20	1.54	1.32	0.83	0.57	0.38	0.25	0.21	0.11

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	14.0	9.3	7.0	4.66	3.26	2.80	1.75	1.20	0.80	0.54	0.44	0.23
1.65V	13.7	9.1	6.9	4.57	3.20	2.74	1.72	1.18	0.78	0.53	0.44	0.23
1.70V	13.5	9.0	6.8	4.49	3.14	2.69	1.68	1.15	0.77	0.52	0.43	0.22
1.75V	13.2	8.8	6.6	4.40	3.08	2.64	1.65	1.13	0.75	0.51	0.42	0.22
1.80V	12.7	8.5	6.4	4.24	2.96	2.54	1.59	1.09	0.73	0.49	0.40	0.21

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

Performance Characteristics

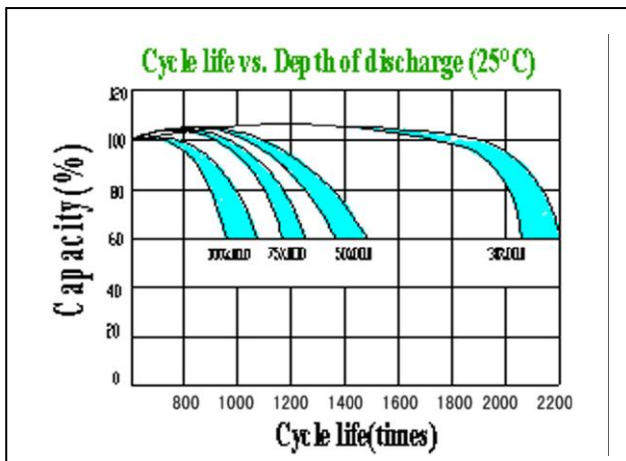

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Lead	Fiberglass	Sulfuric acid

Guangzhou Hengda Battery Co.,Ltd

Tel: 020-84866132 02084866098 Fax: 020-84869892
021-52811136; 021-52826931; 021-52826931-19

JAPATOYO®
<http://www.japatoyo.com>